


Freq.Hertz	ALTO FALANTE IMPEDÂNCIA					
	2 OHMS		4 OHMS		8 OHMS	
	L	C	L	C	L	C
40	8.2 mH	2000 μ F	16.3 mH	1000 μ F	32 mH	500 μ F
80	4.1 mH	1000 μ F	8.2 mH	500 μ F	16 mH	250 μ F
100	3.1 mH	800 μ F	6.2 mH	400 μ F	12 mH	200 μ F
130	2.4 mH	600 μ F	4.7 mH	300 μ F	10 mH	150 μ F
200	1.6 mH	400 μ F	3.3 mH	200 μ F	6.8 mH	100 μ F
260	1.2 mH	300 μ F	2.4 mH	150 μ F	4.7 mH	75 μ F
400	0.8 mH	200 μ F	1.6 mH	100 μ F	3.3 mH	50 μ F
600	0.5 mH	136 μ F	1.0 mH	68 μ F	2.0 mH	33 μ F
800	0.41 mH	100 μ F	0.82 mH	50 μ F	1.6 mH	26 μ F
1000	0.31 mH	78 μ F	0.62 mH	39 μ F	1.2 mH	20 μ F
1200	0.25 mH	66 μ F	0.51 mH	33 μ F	1.0 mH	16 μ F
1800	0.16 mH	44 μ F	0.33 mH	22 μ F	0.68 mH	12 μ F
2000	0.15 mH	40 μ F	0.30 mH	19 μ F	0.65 mH	10 μ F
3000	0.10 mH	28 μ F	0.23 mH	15 μ F	0.40 mH	6.6 μ F
4000	0.08 mH	20 μ F	0.16 mH	10 μ F	0.33 mH	5 μ F
6000	51 μ H	14 μ F	0.10 mH	6.8 μ F	0.20 mH	3.3 μ F
9000	34 μ H	9.5 μ F	68 μ H	4.7 μ F	0.15 mH	2.2 μ F
12000	25 μ H	6.6 μ F	51 μ H	3.3 μ F	100 μ H	1.6 μ F

L = Passa Baixa (Indutor)



C = Passa Alta (Capacitor)

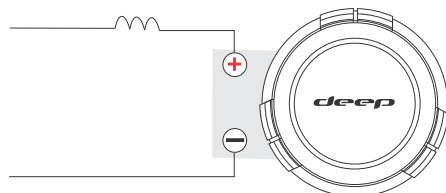